
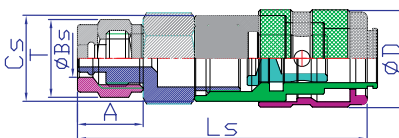

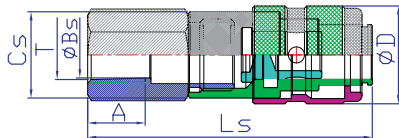


MA TYPE (ONE-HAND QUICK COUPLING)

Model		10	15	20	25	30	40
Size		1/8"	3/16"	1/4"	5/16"	3/8"	1/2"
Material	Steel SC / Brass BSBM / Stainless Steel SUS 304						
Connection method	Socket Plug	Female screw [F] / Male screw [M] / Hose nipple [H] / Lock Tube [P]					
Working pressure / Max. working pressure	Steel	15 / 20 (kgf/cm ²)	1.5 / 2.0 (MPa)	213 / 284 (psi)	15 / 20 (bar)		
	Brass	10 / 15 (kgf/cm ²)	1.0 / 1.5 (MPa)	142 / 213 (psi)	10 / 15 (bar)		
	Stainless Steel	15 / 20 (kgf/cm ²)	1.5 / 2.0 (MPa)	213 / 284 (psi)	15 / 20 (bar)		
Seal material: Working temperature range	Standard	NBR: -20°C ~ +80°C (-4°F ~ +176°F)					
	Optional	VITON: -20°C ~ +180°C (-4°F ~ +356°F) EPDM: -40°C ~ +150°C (-40°F ~ +302°F)					
Applicable fluid	Oil / Air / Water						
Use	Pneumatic tool, Pneumatic piping, Pneumatic machinery, Water piping, etc.						

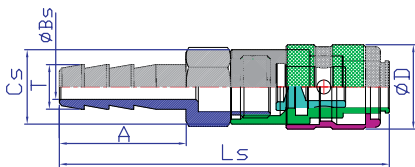

Computer No	Product Sign	Dimension (mm)					
		Ls	D	Cs	A	T	Bs
SUS A2335MAJA BRASS A0115MAJA STEEL A1135MAJA	15SH	63.2	17	15	23	5.5	3
	20SH	65.7	17	15	25.5	7.2	4
	25SH	65.7	17	15	25.5	9	5
	30SH	65.7	17	15	25.5	11.3	7
	40SH	65.7	17	15	25.5	13.8	9.8



Computer No	Product Sign	Dimension (mm)					
		Ls	D	Cs	A	T	Bs
SUS A2335MAJA BRASS A0115MAJA STEEL A1135MAJA	10SF	48.7	17	15	10	PT1/8"28P	9.9
	20SF	50.2	17	15	11.5	PT1/4"19P	13.4
	30SF	50.2	17	15	11.5	PT3/8"19P	16.9

Computer No	Product Sign	Dimension (mm)					
		Ls	D	Cs	A	T	Bs
SUS A2335MAJA BRASS A0115MAJA STEEL A1135MAJA	10SM	49.2	17	15	9	PT1/8"28P	5.5
	20SM	51.2	17	15	11	PT1/4"19P	8
	30SM	51.2	17	15	11	PT3/8"19P	11

Computer No	Product Sign	Dimension (mm)					
		Ls	D	Cs	A	T	Bs
SUS A2335MAJA BRASS A0115MAJA STEEL A1135MAJA	20SP	51.7	17	15	11.5	4*6	6.6
	25SP	53.2	17	15	13	5*8	8.2
	30SP	55.7	17	15	15.5	6.5*10	10.2



MA TYPE (ONE-HAND QUICK COUPLING)

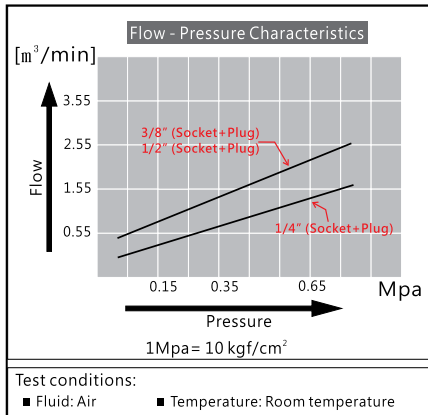





Coupling Releasing

S & P



Coupling Fitting

S + P

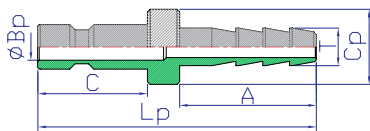

Computer No	Product Sign	Dimension (mm)					
		Lp	C	Cp	A	T	Bp
SUS A2335MAJA BRASS A0115MAJA STEEL A1135MAJA	15PH	49.5	20.5	14	23	5.5	5
	20PH	52	20.5	14	25.5	7.2	5
	25PH	52	20.5	14	25.5	9	5
	30PH	52	20.5	14	25.5	11.3	5
	40PH	52	20.5	14	25.5	13.8	5

Computer No	Product Sign	Dimension (mm)					
		Lp	C	Cp	A	T	Bp
SUS A2335MAJA BRASS A0115MAJA STEEL A1135MAJA	10PF	35	20.5	Ø16*6HEX*14D	12	PT1/8"28P	5
	20PF	37	20.5	Ø19.5*6HEX*17D	14	PT1/4"19P	5
	30PF	37	20.5	Ø24*6HEX*21D	14	PT3/8"19P	5

Computer No	Product Sign	Dimension (mm)					
		Lp	C	Cp	A	T	Bp
SUS A2335MAJA BRASS A0115MAJA STEEL A1135MAJA	10PM	36.5	20.5	Ø12.6*6HEX*11D	10	PT1/8"28P	5
	20PM	37.5	20.5	Ø16*6HEX*14D	11	PT1/4"19P	5
	30PM	37.5	20.5	Ø19.5*6HEX*17D	11	PT3/8"19P	5

Computer No	Product Sign	Dimension (mm)					
		Lp	C	Cp	A	T	Bp
SUS A2335MAJA BRASS A0115MAJA STEEL A1135MAJA	20PP	38	20.5	Ø16*6HEX*14D	11.5	4*6	5
	25PP	39.5	20.5	Ø16*6HEX*14D	13	5*8	5
	30PP	41.5	20.5	Ø16*6HEX*14D	15.5	6.5*10	5

Dimension of T: NPT, BSP, etc. are available to produce besides PT. (Welcome to order special threads)