
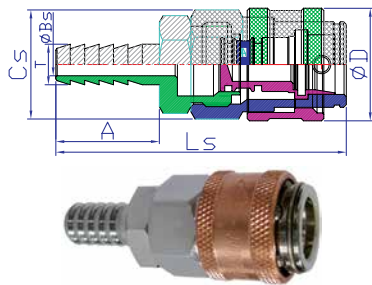
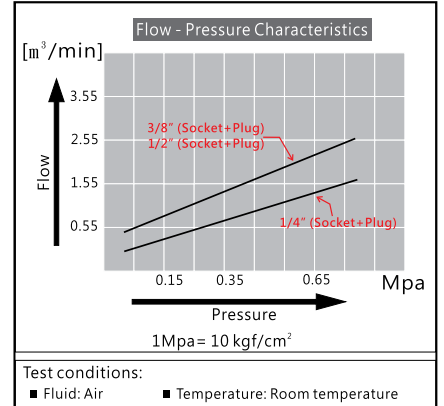


AA TYPE (ONE-HAND QUICK COUPLING)


Connecting with the plug of CA type

 Single Shut-off


Model		10	20	25	30	40
Size		1/8"	1/4"	5/16"	3/8"	1/2"
Material		Steel SC / Brass BSBM / Stainless Steel SUS 304				
Connection method		Female screw [F] / Male screw [M] Hose nipple [H] / Lock Tube [P]				
Working pressure / Max. working pressure	Steel	15 / 20 (kgf/cm ²)	1.5 / 2.0 (MPa)	213 / 284 (psi)	15 / 20 (bar)	
	Brass	10 / 15 (kgf/cm ²)	1.0 / 1.5 (MPa)	142 / 213 (psi)	10 / 15 (bar)	
	Stainless Steel	15 / 20 (kgf/cm ²)	1.5 / 2.0 (MPa)	213 / 284 (psi)	15 / 20 (bar)	
Seal material: Working temperature range	Standard	NBR: -20°C ~ +80°C (-4°F ~ +176°F)				
	Optional	VITON: -20°C ~ +180°C (-4°F ~ +356°F) EPDM: -40°C ~ +150°C (-40°F ~ +302°F)				
Applicable fluid		Oil / Air / Water				
Use		Pneumatic tool, Pneumatic piping, Pneumatic machinery, Water piping, etc.				




Computer No	Product Sign	Dimension (mm)					
		Ls	D	Cs	A	T	Bs
SUS A2335AAJA BRASS A0135AAJA STEEL A1135AAJA	20SH	62.6	25	Ø24*6HEX*21D	23	7.2	3.5
	25SH	62.6	25	Ø24*6HEX*21D	23	9	5
	30SH	62.6	25	Ø24*6HEX*21D	23	11.3	7
	40SH	62.6	25	Ø24*6HEX*21D	23	14.5	10.5



Computer No	Product Sign	Dimension (mm)					
		Ls	D	Cs	A	T	Bs
SUS A2335AAJA BRASS A0135AAJA STEEL A1135AAJA	10SF	49.5	25	Ø24*6HEX*21D	12	PT1/8"28P	8.5
	20SF	49.5	25	Ø24*6HEX*21D	13	PT1/4"19P	11
	30SF	50.6	25	Ø24*6HEX*21D	15	PT3/8"19P	13.5
	40SF	51.6	25	Ø24*6HEX*21D	16	PT1/2"14P	18



Computer No	Product Sign	Dimension (mm)					
		Ls	D	Cs	A	T	Bs
SUS A2335AAJA BRASS A0135AAJA STEEL A1135AAJA	10SM	48.6	25	Ø24*6HEX*21D	9	PT1/8"28P	5
	20SM	52.5	25	Ø24*6HEX*21D	11	PT1/4"19P	8
	30SM	52.6	25	Ø24*6HEX*21D	13	PT3/8"19P	10.5
	40SM	53.6	25	Ø24*6HEX*21D	14	PT1/2"14P	14.8

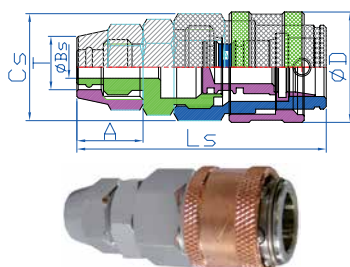

Computer No	Product Sign	Dimension (mm)					
		Ls	D	Cs	A	T	Bs
SUS A2335AAJA BRASS A0135AAJA STEEL A1135AAJA	20SP	46.4	25	Ø24*6HEX*21D	11.5	4*6	3
	25SP	52.6	25	Ø24*6HEX*21D	13	5*8	4
	30SP	55.1	25	Ø24*6HEX*21D	15.5	6.5*10	5
	40SP	54.6	25	Ø24*6HEX*21D	17	8*12	6.5

Dimension of T: NPT, BSP, etc. are available to produce besides PT. (Welcome to order special threads)